



SUPER-DRY

FSD SERIES | Water Separators | ...


BULK LIQUID REMOVAL



- UP TO 515 SCFM
- HEAVY DUTY HOUSING FOR HIGH DURABILITY
- ZERO AIR LOSS FLOAT DRAIN INCLUDED
- EXCELLENT LIQUID REMOVAL EFFICIENCIES AT ALL FLOW CONDITIONS

Specifications and ordering information:

Model	Air Flow @ 100 psig scfm	Inlet/Outlet NPT in	Dimensions			Weight lbs
			A	B	C	
FSD-45-W	45	½	3.75	8	6.75	2
FSD-85-W	100	¾	3.75	10.5	9.5	2.2
FSD-185-W	180	1	5	12	10.25	5
FSD-375-W	370	1 ½	5	15	13.5	6
FSD-515-W	515	2	6.75	20	8	14.5

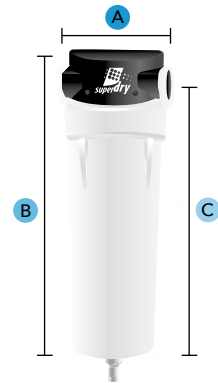

Maximum inlet temperature: 176°F (80°C) Maximum inlet pressure: 232 psig



Phone: 1.888.828.1122 • Fax: 1.888.828.1133 • Email: info@super-dry.com

WWW.SUPER-DRY.COM