



# FC/FD Series

## MINI FILTERS AND DESICCANT DRYERS



### Replacement kit for **FC-½** & **FC-1**

#### WARNING

Risk of injury. Release all air pressure from system before servicing.

#### FC/FD Series


##### HOW TO INSTALL A NEW REPLACEMENT KIT

- Press on the latch pin and turn the bowl 1/8 left or right.
- Remove the old coalescer filter and install the new one.
- Put the bowl back and make sure that the latch pin is in the center of the head unit.
- Re-open air supply SLOWLY. Check for air leakage. If leakage occurs, shut off air supply, relieve pressure from unit by manually activating the drain cock on the bottom of the FC, and make sure that the bowl is installed properly.

##### REPLACEMENT KIT INCLUDES

Coalescer Element x 1

##### INSTALLATION

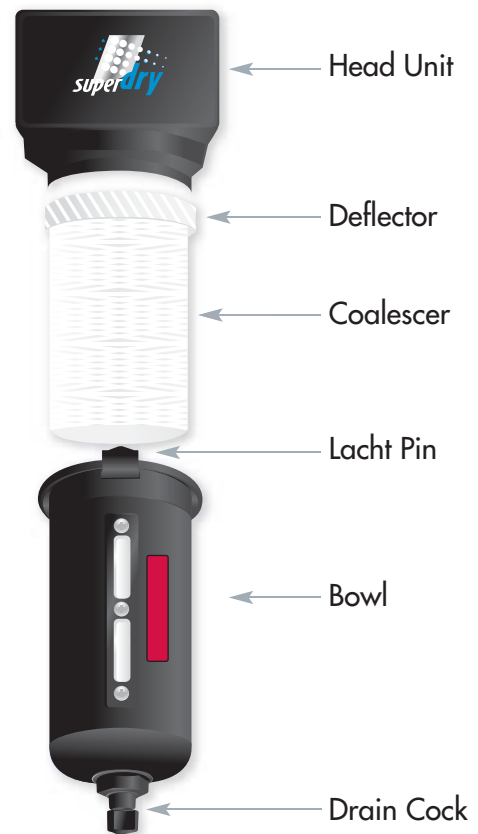

2104 Francis-Hughes, Laval (Qc) Canada H7S 1N7  
Tel.: 1-888-828-1122 | Fax: 1-888-828-1133  
info@super-dry.com  
[www.super-dry.com](http://www.super-dry.com)